



LED Controller

Quick Start Guide

Legal Information

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- **HIKVISION** and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade

dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES

OR LOSS.

- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Preface

Applicable Models

This manual is applicable to the DT30/DT60/DT90 series LED controllers.

Symbol Conventions

The symbols that may be found in this document are defined as follows.


Symbol	Description
 Note	Provides additional information to emphasize or supplement important points of the main text.
 Caution	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 Danger	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

Safety Instructions

Caution

- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region.
- The device must be connected to an earthed mains socket-outlet.
- The socket-outlet shall be installed near the device and shall be easily accessible.
- Do not touch the bare components (such as the metal contacts of the inlets) and wait for at least 5 minutes, since electricity may still exist after the device is powered off.
- Never place the device in an unstable location. The device may fall, causing serious personal injury or death.
- This device is not suitable for use in locations where children are likely to be present.
-  **CAUTION:** Risk of explosion if the battery is replaced by an incorrect type.
- Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).

- Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
- Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
- Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
- Dispose of used batteries according to the instructions.
- Keep body parts away from fan blades. Disconnect the power source during servicing.
- Class 1 laser product used with compatible Class 1 fiber optical transceivers according to IEC 60825-1:2014 and EN 60825-1:2014+A11:2021, and hazard level 1 based on IEC 60825-2:2021 and EN 60825-2:2004+A1:2007+A2:2010. Make sure that the power has been disconnected before you wire, install, maintain, or repair. When any laser equipment is in use, make sure that the device lens is not exposed to the laser beam, or it may burn out. The laser radiation emitted from the device can cause eye injuries, burning of skin or inflammable substances. Before enabling the laser ranging function, make sure no human or inflammable substances are in front of the laser lens. Do not place the device where minors can fetch it.



Note

- Provide a surge suppressor at the inlet opening of the device under special conditions such as the mountain top, iron tower, and forest.
- + identifies the positive terminals of the device which is used with, or generates direct current, and - identifies the negative terminals of the device which is used with, or generates direct current.
- The serial port of the device is used for debugging only.
- The interface varies with the models. Please refer to the product datasheet for details.
- The USB port of the device is used for connecting to a mouse, a keyboard, a USB flash drive, or a USB receiver for an RF remote control only. The current for the connected device shall be not more than 0.1 A.
- Make sure that the power has been disconnected before you wire, install, or disassemble the device.
- The device shall not be exposed to water dripping or splashing, and no objects filled with liquids, such as vases, shall be placed on the device.
- No naked flame sources, such as lighted candles, should be placed on the device.
- If smoke, odor, or noise arises from the device, immediately turn off the power, unplug the power cable, and contact the service center.
- Install the device according to the instructions in Quick Start Guide.

- To prevent injury, this device must be securely attached to the installation surface in accordance with the installation instructions.
- The ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, table-cloths, curtains. The openings shall never be blocked by placing the device on a bed, sofa, rug, or other similar surface.

TABLE OF CONTENTS

Chapter 1 Introduction	1
1.1 Overview	1
1.2 Appearance.....	1
1.2.1 DT30 Series	2
1.2.2 DT60 Series	4
1.2.3 DT90 Series	11
Chapter 2 Installation	17
2.1 Safety Precautions	17
2.2 Open Package and Check Items.....	18
2.3 Install the Device.....	19
2.3.1 Flat Placement	19
2.3.2 Cable Tie Suspension	20
2.3.3 Wall Mounting	20
2.3.4 Rack Mounting.....	21
2.4 Connect Cables	25
2.4.1 Connect the Ground wire	25
2.4.2 Connect the Network Cable.....	27
2.4.3 Connect the Power Cord.....	27
2.5 Configure Display Mapping.....	27

Chapter 1 Introduction

1.1 Overview

The LED controller (hereinafter referred to as the device) controls the full-color LED display (hereinafter referred to as the display or screen) and is suitable for various occasions such as meeting rooms, broadcasting studios, stadiums, airports, stations, banks, advertising locations, and home theaters. After connecting the screens, the device can efficiently manage and control the screens and seamlessly splice the screens.



Note

This radio transmitter (IC:20199-DT60P02HDI2) has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Antenna Type: Dipole Antenna with SMA connector

Antenna Gain: 3.5 dBi

1.2 Appearance

LED controllers of the same series have a uniform appearance, though interface layouts vary across models (check the actual product for details). To demonstrate all possible features, this documentation uses the panel version with the most ports as the standard reference.

Table 1-1 Available LED Controller Series

Product Series	Number of Data Output Ports	Available Model
DS-DT30	1/2	P
DS-DT60	2/4/6/12/20	C/V/B/P
DS-DT90	16/24/40	C/V/P

1.2.1 DT30 Series

Front Panel

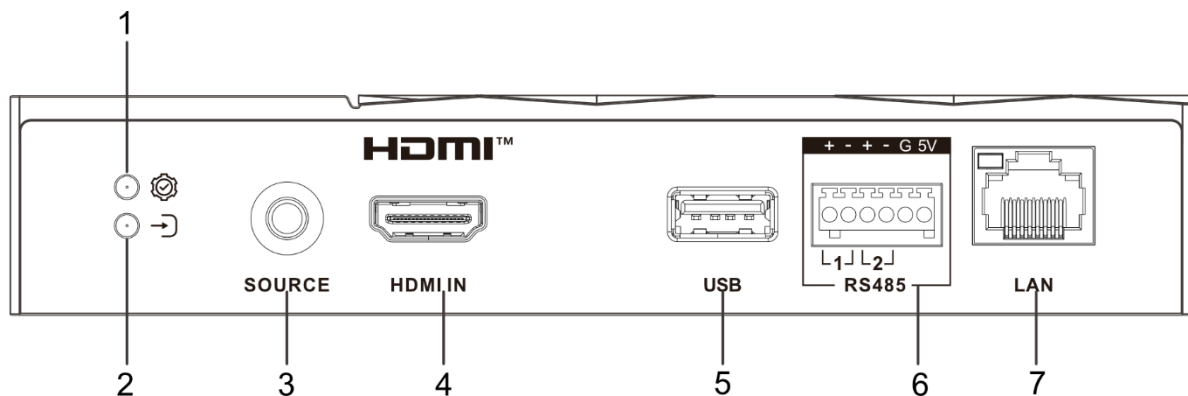


Figure 1-1 DT30 Series Device Front Panel

No.	Name	Description
1	System status LED	● Solid on: Device is in self-test mode. ● Off: Device is off or has a fault. ● Fast blinking: Device is in active mode. ● Slow blinking: Device is in sleep mode.
2	Signal status LED	● Solid on: Input signal detected. ● Off: No input signal present.
3	Signal source button	Press to cycle through available input sources.
4	HDMI input port (HDMI IN)	Features one HDMI input, supporting a maximum input resolution of 1920 × 1080@60 Hz.
5	USB 2.0 port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. After connecting a USB drive, you can import or export programs, materials and the schedule, or play content from the drive (this feature must be enabled first in the device's web interface).
6	RS-485 port	Dual-channel configuration: ● Channel 1: For central control device connection. ● +: Connect to the positive terminal of the central control device. ● -: Connect to the negative terminal of the central control device. ● Channel 2: For light sensor connection.

No.	Name	Description
		● +: Connect to the positive terminal of the light sensor. ● -: Connect to the negative terminal of the light sensor. ● Shared terminals: ● G: Ground terminal connection. ● 5V: 5V DC power output.
7	Debug port (LAN)	Provides one Ethernet port for device debugging over a network cable.

Rear Panel

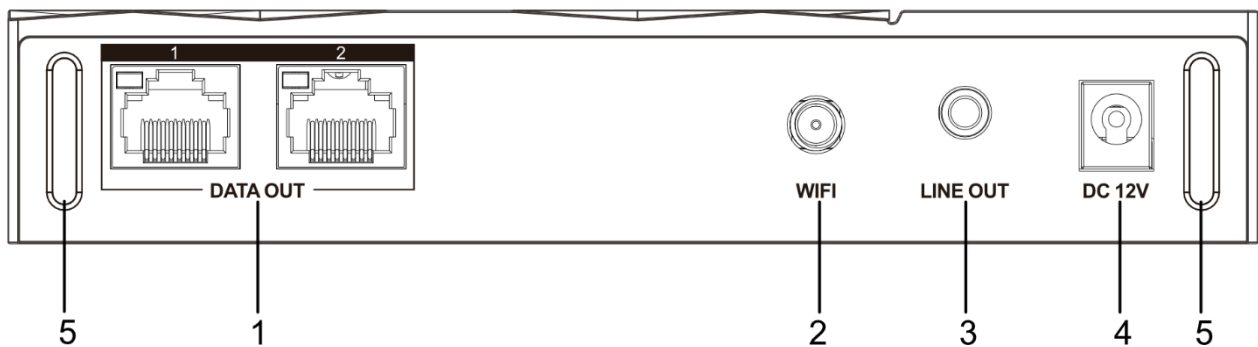


Figure 1-2 DT30 Series Device Rear Panel

No.	Name	Description
1	Output network port (DATA OUT)	Provides 1 or 2 ports for LED display connection.
2	Wireless port (WIFI)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi or hotspot functions via the LED Tool client or the device web interface.
3	Audio output port (LINE OUT)	Outputs the audio synchronized with the current video to an amplified playback device.
4	DC power input (DC 12V)	Connect the 12VDC power via $\Phi 2.1\text{mm}$ DC adapter.
5	Cable tie holes	Used for threading nylon cable ties to securely fasten the device to a bracket or other structure, preventing it from moving or falling off.

1.2.2 DT60 Series

2K Device Front Panel

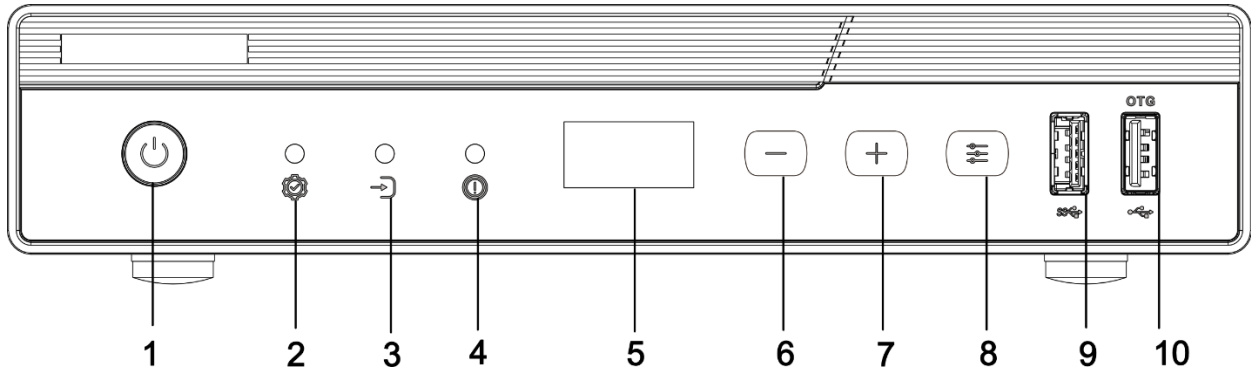


Figure 1-3 DT60 Series 2K Device Front Panel

No.	Name	Description
1	Power switch/power LED	● Short press to toggle power state. ● Power LED status: ● On: Device powered on. ● Off: Device powered off.
2	Active LED	● Fast blinking: Device is in normal operation (non self-test mode). ● Slow blinking: Device is in soft shutdown. ● Solid on: Device is in self-test mode. ● Off: Device is off or has a fault.
3	Signal source LED	● Solid green: Input signal detected. ● Off: No input signal present. ● Blinking: Signal instability detected.
4	Error LED	● Solid green: Error detected. ● Off: Normal status.
5	LCD panel	Displays IP address, signal source, output resolution and frame rate, brightness level, and system status.  Note This LCD panel is only supported on V and P models.
6	Button –	● Normal mode: Press to decrease brightness. ● Self-test mode: Press to cycle backward through test patterns.
7	Button +	● Normal mode: Press to increase brightness.

No.	Name	Description
		• Self-test mode: Press to cycle forward through test patterns.
8	Signal source button	• Press to cycle through available input sources. • Press and hold the button to enter or exit self-test mode.
9	USB 3.0 port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. After connecting a USB drive to a P device, you can import or export programs, materials and the schedule, or play content from the drive (this feature must be enabled first in the device's web interface).
10	USB 2.0 port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. When a USB flash drive is connected, the following functions are available depending on the device type: • C/V model: Support USB debugging. • P model: Allow importing or exporting programs, materials, and the schedule, as well as playing content from the USB drive (this feature must be enabled first in the device's web interface).

2K Device Rear Panel

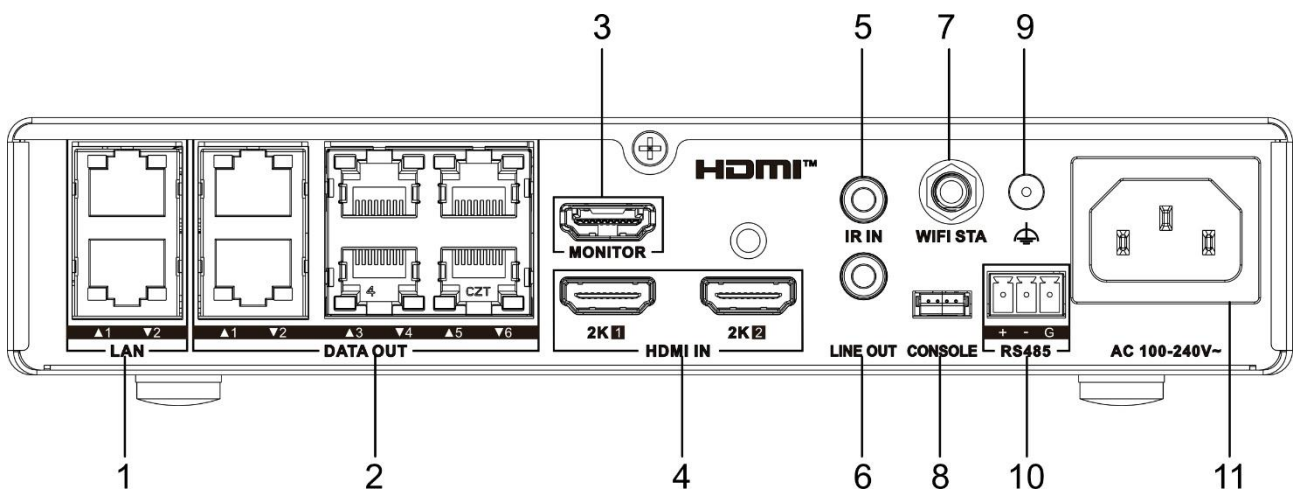


Figure 1-4 DT60 Series 2K Device Rear Panel

No.	Name	Description
1	Debug port (LAN)	Provides 2 Ethernet ports for device debugging over network cables.
2	Output network port (DATA OUT)	Provides 2, 4, or 6 ports for LED display connection.

No.	Name	Description
3	HDMI output port (MONITOR)	This port outputs a fixed 720p signal for connecting to a monitor to view the LED display status.  Note This port is only supported on V and P models.
4	HDMI input port (2K HDMI IN)	Features 1, 2, or 3 HDMI input ports, supporting a maximum input resolution of 1920 × 1200@60 Hz.
5	IR input port (IR IN)	Connect to an infrared (IR) control device.
6	Audio output port (LINE OUT)	Connect to an amplified audio playback device. • With multiple signal sources, the system outputs audio from the active source. • Each video wall outputs audio from one signal source at a time. • By default, the video wall outputs the audio of the first decoded signal source, but this can be manually switched.
7	Wireless port (WIFI STA)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on P model.
8	Console port	Connect a serial cable for device debugging.
9	Grounding terminal	Connect a ground wire.
10	RS-485 port	Connect to the RS-485 port of a central control device.
11	AC power input (AC 100-240V~)	Connect an AC power cord.

4K Device Front Panel

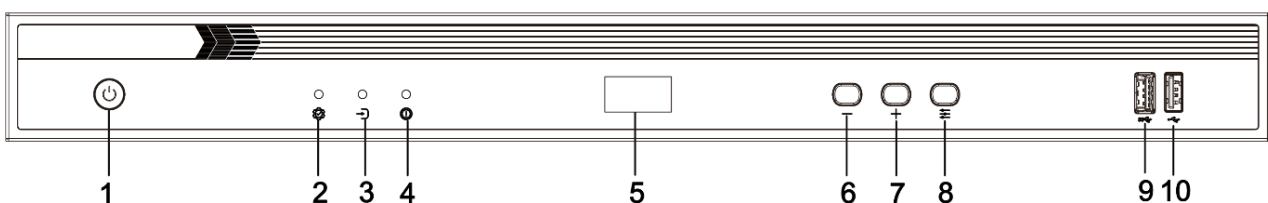


Figure 1-5 DT60 Series 4K Device Front Panel

No.	Name	Description
1	Power switch/power LED	● Short press to toggle power state. ● Power LED status: ● On: Device powered on. ● Off: Device powered off.
2	Active LED	● Fast blinking: Device is in normal operation (non self-test mode). ● Slow blinking: Device is in soft shutdown. ● Solid on: Device is in self-test mode. ● Off: Device is off or has a fault.
3	Signal source LED	● Solid green: Input signal detected. ● Off: No input signal present. ● Blinking: Signal instability detected.
4	Error LED	● Solid green: Error detected. ● Off: Normal status.
5	LCD panel	Displays IP address, signal source, output resolution and frame rate, brightness level, and system status.
6	Button –	● Normal mode: Press to decrease brightness. ● Self-test mode: Press to cycle backward through test patterns.
7	Button +	● Normal mode: Press to increase brightness. ● Self-test mode: Press to cycle forward through test patterns.
8	Signal source button	● Press to cycle through available input sources. ● Press and hold the button to enter or exit self-test mode.
9	USB 3.0 port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. After connecting a USB drive to a B or P device, you can import or export programs, materials and the schedule, or play content from the drive (this feature must be enabled first in the device's web interface).
10	USB 2.0 port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. When a USB flash drive is connected, the following functions are available depending on the device type: ● C/V model: Support USB debugging.

No.	Name	Description
		● B/P model: Allow importing or exporting programs, materials, and the schedule, as well as playing content from the USB drive (this feature must be enabled first in the device's web interface).

4K Device Rear Panel

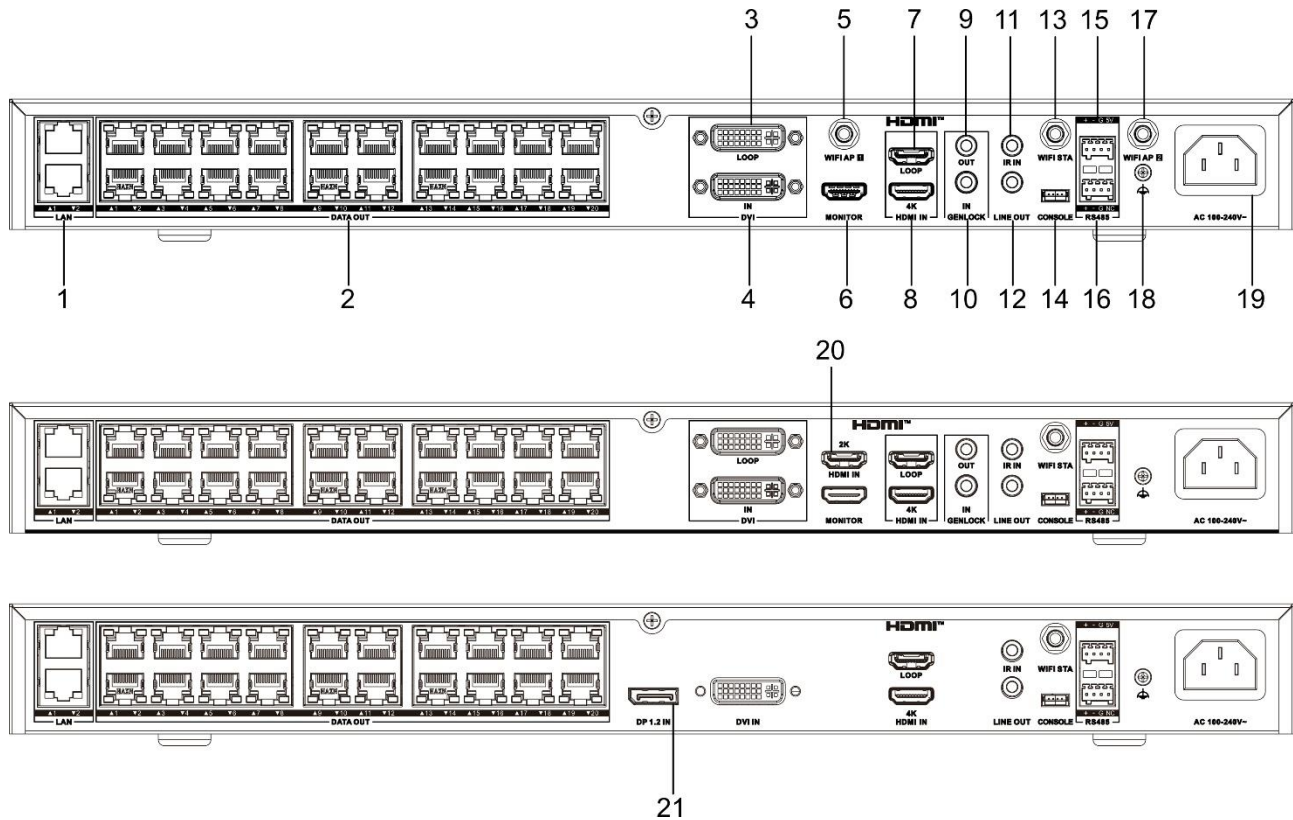


Figure 1-6 DT60 Series 4K Device Rear Panel

No.	Name	Description
1	Debug port (LAN)	Provides 2 Ethernet ports for device debugging over network cables.
2	Output network port (DATA OUT)	Provides 12 or 20 ports for LED display connection.
3	DVI loop-through output port (LOOP)	● Connect to the DVI port of a display device to monitor the signal source status. ● Connect to the DVI IN port of the next device for signal loop-through.

No.	Name	Description
		 Note This port is only supported on V and P models.
4	DVI input port (DVI IN)	Features one DVI input, supporting a maximum input resolution of 1920 × 1200@60 Hz.
5	Wireless port (WIFI AP 1)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on B and P models.
6	HDMI output port (MONITOR)	This port outputs a fixed 720p signal for connecting to a monitor to view the LED display status.  Note This port is only supported on V and P models.
7	HDMI loop-through output port (LOOP)	● Connect to the HDMI port of a display device to monitor the signal source status. ● Connect to the HDMI IN port of the next device for signal loop-through.  Note This port is only supported on V, B, and P models.
8	HDMI input port (4K HDMI IN)	Features one HDMI input, supporting a maximum input resolution of 4096 × 2160@60 Hz.
9	Sync output port (GENLOCK OUT)	Connect to the GENLOCK IN port of the next device.  Note ● This port is only supported on V and P models. ● This port is plug-and-play. No configuration is required.

No.	Name	Description
10	Sync input port (GENLOCK IN)	Connect to the GENLOCK OUT port of the next device.  Note ● This port is only supported on V and P models. ● This port is plug-and-play. No configuration is required.
11	IR input port (IR IN)	Connect to an infrared(IR) control device.
12	Audio output port (LINE OUT)	Connect to an amplified audio playback device. ● With multiple signal sources, the system outputs audio from the active source. ● Each video wall outputs audio from one signal source at a time. ● By default, the video wall outputs the audio of the first decoded signal source, but this can be manually switched.
13	Wireless port (Wi-Fi STA)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on B and P models.
14	Console port	Connect a serial cable for device debugging.
15	RS-485 port for light sensor	Connect to the RS-485 port of a light sensor, ensuring proper pin mapping: ● +: Connect to the positive terminal of the light sensor. ● -: Connect to the negative terminal of the light sensor. ● GND: Connect to the ground terminal of the light sensor. ● 5V: Connect to the power input terminal of the light sensor to provide 5V DC power supply to the light sensor.
16	RS-485 port for central control device	Connect to the RS-485 port of a central control device, ensuring proper pin mapping: ● +: Connect to the positive terminal of the central control device. ● -: Connect to the negative terminal of the central control device.

No.	Name	Description
		● GND: Connect to the ground terminal of the central control device. ● NC: Keep unconnected.
17	Wireless port (WIFI AP 2)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on B and P models.
18	Grounding terminal	Connect a ground wire.
19	AC power input (AC 100-240V~)	Connect an AC power cord.
20	HDMI input port (2K HDMI IN)	Features one HDMI input, supporting a maximum input resolution of 1920 × 1200@60 Hz.
21	DP input port (DP 1.2 IN)	Features one DP input, supporting a maximum input resolution of 4096 × 2160@60 Hz.

1.2.3 DT90 Series

Front Panel

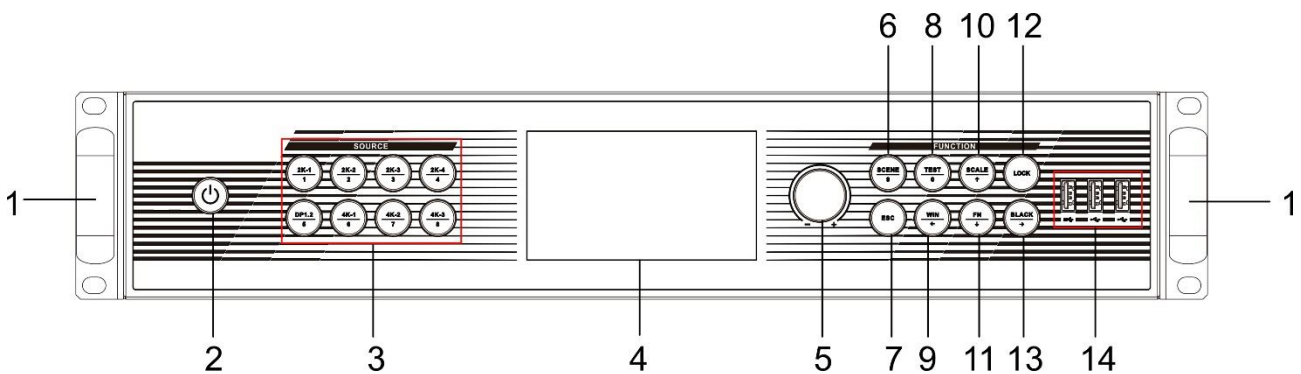


Figure 1-7 DT90 Series Device Front Panel

No.	Name	Description
1	Mounting Ears	Hold the handles on the mounting ears with both hands to move the device.
2	Power switch/power LED	● Short press to toggle power state.

No.	Name	Description
		● Power LED status: ● On: Device powered on. ● Off: Device powered off.
3	Signal source button	One-touch switch to the corresponding signal source EDID configuration interface. ● 2K-1/1: Corresponds to 2K HDMI IN 1. ● 2K-2/2: Corresponds to 2K HDMI IN 2. ● 2K-3/3: Corresponds to 2K HDMI IN 3. ● 2K-4/4: Corresponds to 2K HDMI IN 4. ● DP1.2/5: Corresponds to DP 1.2 IN. ● 4K-1/6: Corresponds to 4K HDMI IN 1. ● 4K-2/7: Corresponds to 4K HDMI IN 2. ● 4K-3/8: Corresponds to 4K HDMI IN 3.  Note This button is only supported on V and P models.
4	LCD control panel	● Status monitoring: Displays real-time device status and key parameters. ● Quick configuration: Adjust LED display parameters directly via physical buttons.
5	Knob	● Rotate clockwise to increase the value, and counterclockwise to decrease the value. ● Rotate the knob to move the menu selection bar. ● Press the knob to enter the secondary menu.
6	SCENE button/9	Enter scene configuration interface.
7	ESC button	Return to the previous menu or exit the current interface.
8	TEST button	Enter self-test configuration interface.
9	WIN button	Enter layer selection interface.
10	SCALE button	Enter screen resolution customization interface.
11	FN button	Enter custom menu interface.
12	LOCK button	Press once to lock the front panel buttons and knob, and press again to unlock them.
13	BLACK button	● Press to display a black screen (indicator lights up).

No.	Name	Description
		● Press again to restore normal display (indicator turns off).
14	USB port	Supports connection of a mouse, keyboard, FAT32-formatted USB flash drive, or a USB receiver for an RF remote control. ● P model: 2 × USB 2.0 + 1 × USB 3.0 ports. ● C/V model: 1 × USB 2.0 port. ● P model: Allow importing or exporting programs, materials, and the schedule, as well as playing content from the USB drive (this feature must be enabled first in the device's web interface).

Rear Panel

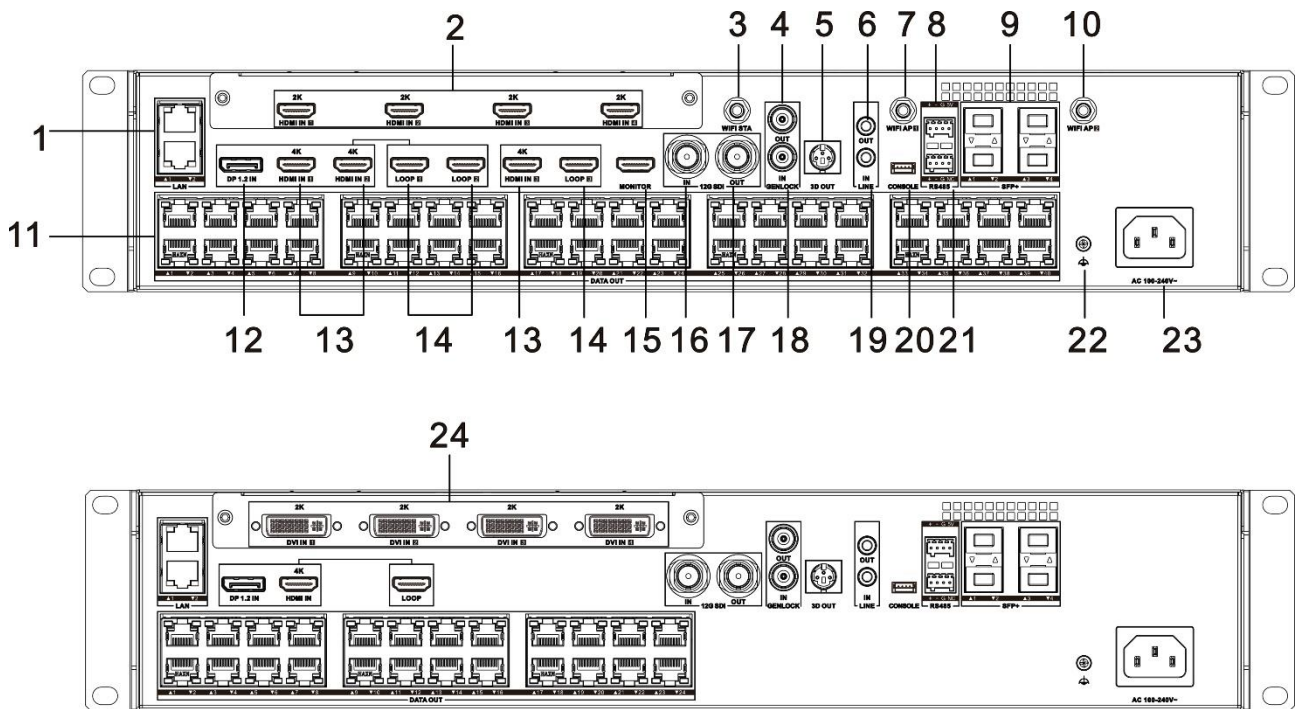


Figure 1-8 DT90 Series Device Rear Panel

No.	Name	Description
1	Debug port (LAN)	Provides 2 Ethernet ports for device debugging over network cables.
2	2K HDMI input port (2K HDMI IN)	Features 4 HDMI input ports, supporting a maximum input resolution of 1920 × 1200@60 Hz. Note This port is only supported on V and P models.

No.	Name	Description
3	Wireless port (Wi-Fi STA)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on P model.
4	Sync output port (GENLOCK OUT)	Connect to the GENLOCK IN port of the next device.
5	3D output port (3D OUT)	Connect to a 3D signal transmitter for synchronized 3D video playback with 3D glasses.
6	Audio output port (LINE OUT)	Connect to an amplified audio playback device. • With multiple signal sources, the system outputs audio from the active source. • Each video wall outputs audio from one signal source at a time. • By default, the video wall outputs the audio of the first decoded signal source, but this can be manually switched.
7	Wireless port (WIFI AP 1)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on P model.
8	RS-485 port for light sensor	Connect to the RS-485 port of a light sensor, ensuring proper pin mapping: • +: Connect to the positive terminal of the light sensor. • -: Connect to the negative terminal of the light sensor. • GND: Connect to the ground terminal of the light sensor. • 5V: Connect to the power input terminal of the light sensor to provide 5V DC power supply to the light sensor.

No.	Name	Description
9	10G optical port (SFP+)	Provides 4 ports for long-distance transmission of display mapping data via fiber to the same-model device.
10	Wireless port (WIFI AP 2)	Install the Wi-Fi antenna, connect to the hotspot using the SSID and password on the device label. Once connected, you can configure Wi-Fi, Bluetooth, or hotspot functions via the LED Tool client or the device web interface.  Note This port is only supported on P model.
11	Output network port (DATA OUT)	Connect to LED displays via network cables. Port count varies: ● P model: 24 or 40 ports. ● V model: 24 or 16 ports. ● C model: 24 ports.
12	DP input port (DP 1.2 IN)	Features one DP input, supporting a maximum input resolution of 4096 × 2160@60 Hz.
13	4K HDMI input port (4K HDMI IN)	● Features 1 or 3 HDMI input ports, supporting a maximum input resolution of 4096 × 2160@60 Hz. ● Port count varies: ● V/P model: 3 ports. ● C model: 1 port.
14	HDMI loop-through output port (LOOP)	● Connect to the HDMI port of a display device to monitor the signal source status. ● Connect to the HDMI IN port of the next device for signal loop-through. ● Port count varies: ● V/P model: 3 ports. ● C model: 1 port.
15	HDMI output port (MONITOR)	This port outputs a fixed 1080p signal for connecting to a monitor to view the LED display status.  Note This port is only supported on V and P models.

No.	Name	Description
16	12G SDI input port (12G SDI IN)	Features one SDI input (BNC port), supporting a maximum input resolution of 4096 × 2160@60 Hz.
17	12G SDI output port (12G SDI OUT)	● Connect to a BNC display for SDI source monitoring. ● Connect to the SDI IN port of the next device for signal loop-through.
18	Sync input port (GENLOCK IN)	Connect to the GENLOCK OUT of the previous device.
19	Audio input port (LINE IN)	Connect to an active audio source.
20	Debug port (CONSOLE)	Provides one Ethernet port (baud rate: 115200) for device debugging over a network cable.
21	RS-485 port for central control device	Connect to the RS-485 port of a central control device, ensuring proper pin mapping: ● +: Connect to the positive terminal of the central control device. ● -: Connect to the negative terminal of the central control device. ● GND: Connect to the ground terminal of the central control device. ● NC: Keep unconnected.
22	Grounding terminal	Connect a ground wire.
23	AC power input (AC 100-240V~)	Connect an AC power cord.
24	DVI input port (DVI IN)	Features one DVI input, supporting a maximum input resolution of 1920 × 1200@60 Hz.  Note This port is only supported on C model.

Chapter 2 Installation

2.1 Safety Precautions



As a high-precision, system-level electronic product, the device should be installed and maintained by professionals.

In order to avoid personal and property injury, please read the safety precautions in this section carefully before installation. The following safety recommendations do not cover all possible dangerous situations.

Electricity Safety

- During the installation, wiring, disassembly, and maintenance of the device, please disconnect the power supply and do not operate with electricity (except for the operation of the hot plug).
- In the installation and use of the device, make sure to follow the local electrical safety regulations.
- In case of abnormal phenomena such as smoke or odor occur during the use of the device, please cut off the power immediately, unplug the power cord from the socket, and contact the after-sales service center in time.

Anti-Static Measures

The equipment is a precision electronic device. In order to avoid static electricity from damaging the components, in addition to anti-static measures in the equipment room, you must wear anti-static gloves or anti-static wrists during the installation process.

Grounding Requirements

In order to ensure personal safety and device safety, the device must be grounded.

Power Supply Requirements

- 2K devices in the DT60 series and all devices in the DT90 series: Support 100 VAC to 240 VAC, 50/60 Hz. To ensure stable operation, connecting to a UPS is recommended.
- 4K devices in the DT60 series: Support 200 VAC to 240 VAC, 50/60 Hz. To ensure stable operation, connecting to a UPS is recommended.
- All devices in the DT30 series: Powered by a 12 VDC power adapter.

Anti-Interference Requirements

- The on-site power supply system must have effective measures to prevent grid interference.

- Do not use the working ground together with the grounding device or lightning protection grounding device of power equipment, and keep the two as far away as possible.
- Keep away from high-power radio transmitters, radar transmitters, and high-frequency and high-current equipment.
- When necessary, electromagnetic shielding can be used for anti-interference.

Environmental Requirements

The device is a system-level monitoring equipment, which is generally placed in the central equipment room of the monitoring system at all levels. The selection of the installation site should comply with the relevant standards of the equipment room construction in the country and region of use.

The device is a standard rack-mounted equipment. Please pay attention to the following information during installation and use:

- Ensure that the temperature in the rack is from 0 °C to 45 °C.
- Ensure that the humidity in the equipment room is between 10% RH and 90% RH (no condensation).
- Ensure that the rack is strong enough to support the weight of the device and its accessories. During the installation, avoid the risk caused by uneven mechanical load.
- Ensure that there is enough installation space for the video and audio cables. The bending radius of a cable should not be less than 5 times the cable outer diameter.
- To ensure good ventilation, install the device at the position above the ground of at least 4 cm.
- Do not block the air vents and outlets of the device. Keep the air vents and outlets at least 4 cm away from the chassis surface.

2.2 Open Package and Check Items

Open the device package to verify that all items in the package are intact according to the packing list.

Table 2-1 DT30 Series Device Packing List

Item	Quantity
Device	1
Terminal block	1 × 6-position terminal block
DC adapter	1
Rod-shaped Wi-Fi antenna	P: 1
RF remote control	1
Regulatory compliance and safety information manual	1

Table 2-2 DT60 Series Device Packing List

Item	Quantity
Device	1
Terminal block	2K devices (C/V/P): 1 × 3-position terminal block 4K devices (V/B/P): 2 × 4-position terminal blocks
RF remote control	1
Regulatory compliance and safety information manual	1
Mounting ear	2K devices (C/V/P): 1 4K devices (V/B/P): 2
Connecting bracket	2K devices (C/V/P): 1
AC power cord	1
Rubber feet	4K devices (C/V/B/P): 4
Rod-shaped Wi-Fi antenna	2K devices (P): 1 4K devices (B/P): 3

Table 2-3 DT90 Series Device Packing List

Item	Quantity
Device	1
Terminal block	2 × 4-position terminal block
Rubber feet	4
AC power cord	1
Rod-shaped Wi-Fi antenna	P: 3
RF remote control	1
Regulatory compliance and safety information manual	1

2.3 Install the Device

2.3.1 Flat Placement

Supported Devices

DT30 series device.

Steps

Place the device horizontally on a stable table or desktop, ensuring no risk of tilting or shaking.

2.3.2 Cable Tie Suspension

Supported Devices

DT30 series device.

Important

Leave at least 5cm of excess length on the cable tie for fastening.

Steps

Step 1 Use two standard cable ties (recommended width $\geq 5\text{mm}$) and thread them through the cable tie holes (1) on the back of the device.

Step 2 Secure the device by hanging it on a pipe, railing, or other support structure.

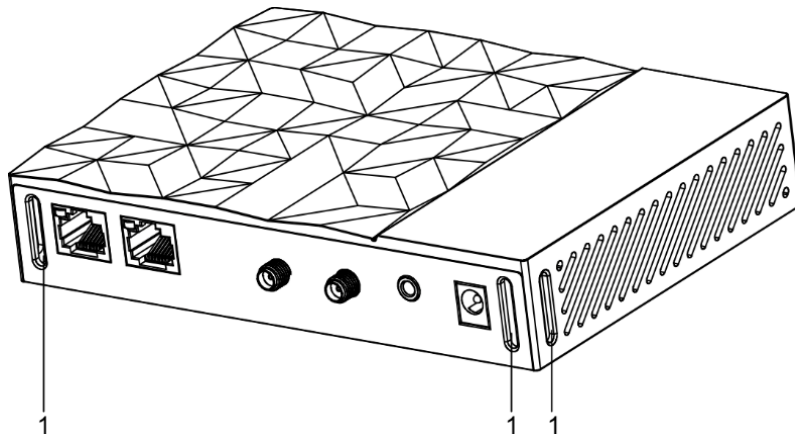


Figure 2-1 Cable Tie Suspension

2.3.3 Wall Mounting

Supported Devices

DT30 series device.

Important

- Ensure the wall is made of concrete or solid brick.
- Prepare two M4 expansion screws.

Steps

Step 1 Drill holes in the wall with a 130mm center-to-center distance, matching the diameter of the expansion screws.

Step 2 Insert the expansion screws into the holes.

Step 3 Align the wall-mounting holes (1) at the bottom of the device and press downward until it clicks into place.

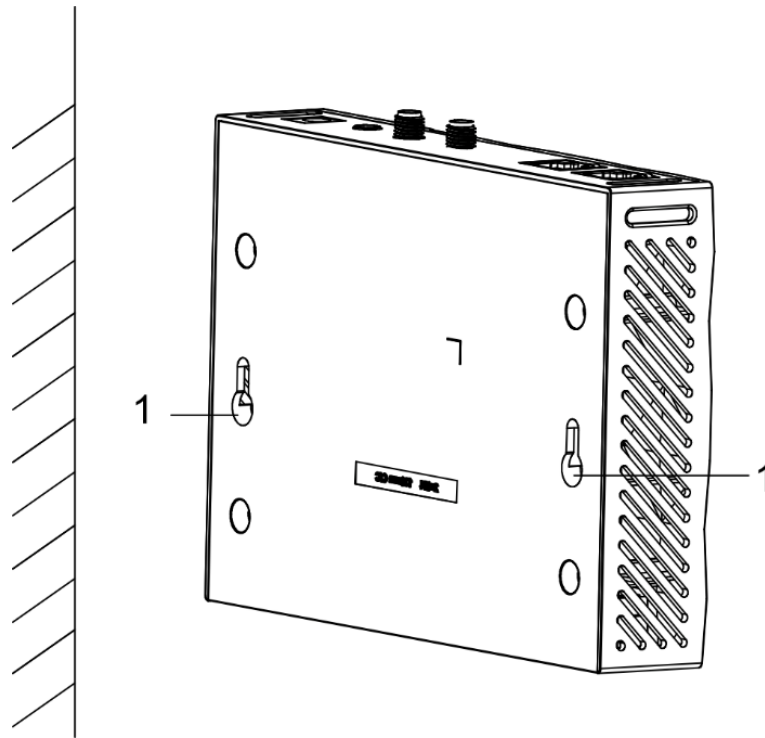


Figure 2-2 Wall Mounting

2.3.4 Rack Mounting

Install Connecting Brackets and Mounting Ears

Supported Devices

DT60 series 2K device.

Important

- Prepare the rack and screws by yourself.
- If you install multiple layers of devices in the rack, keep at least one rack post hole between each layer of devices.

Steps

Step 1 Use two KM3 × 6 countersunk screws (1) to install one mounting ear (2) to the left side of the first device front panel. Use the same method to install the other mounting ear to the right side of the second device front panel.

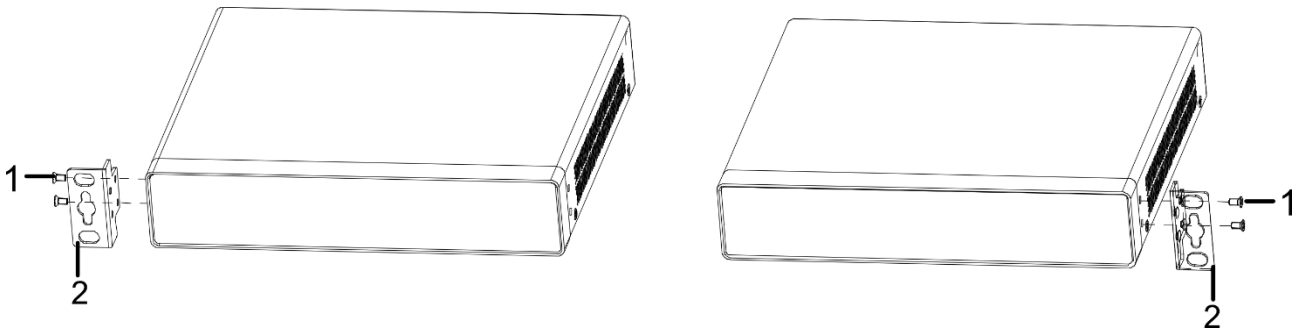


Figure 2-3 Install the Mounting Ears

Step 2 Use two KM3 × 6 countersunk screws (1) to install two connecting brackets (3) to the inner sides of two devices with the FRONT surface facing forward and arrow facing upward.

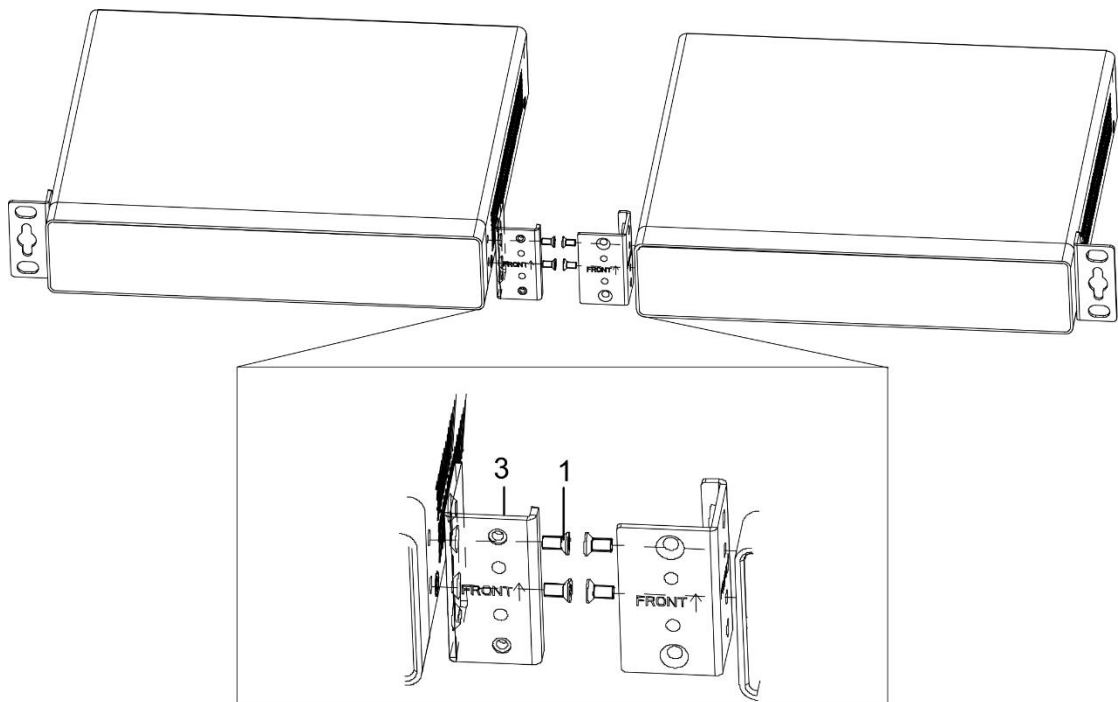


Figure 2-4 Install the Connecting Brackets

Step 3 Use two KM3 × 6 countersunk screws (1) to secure the connecting brackets (3).

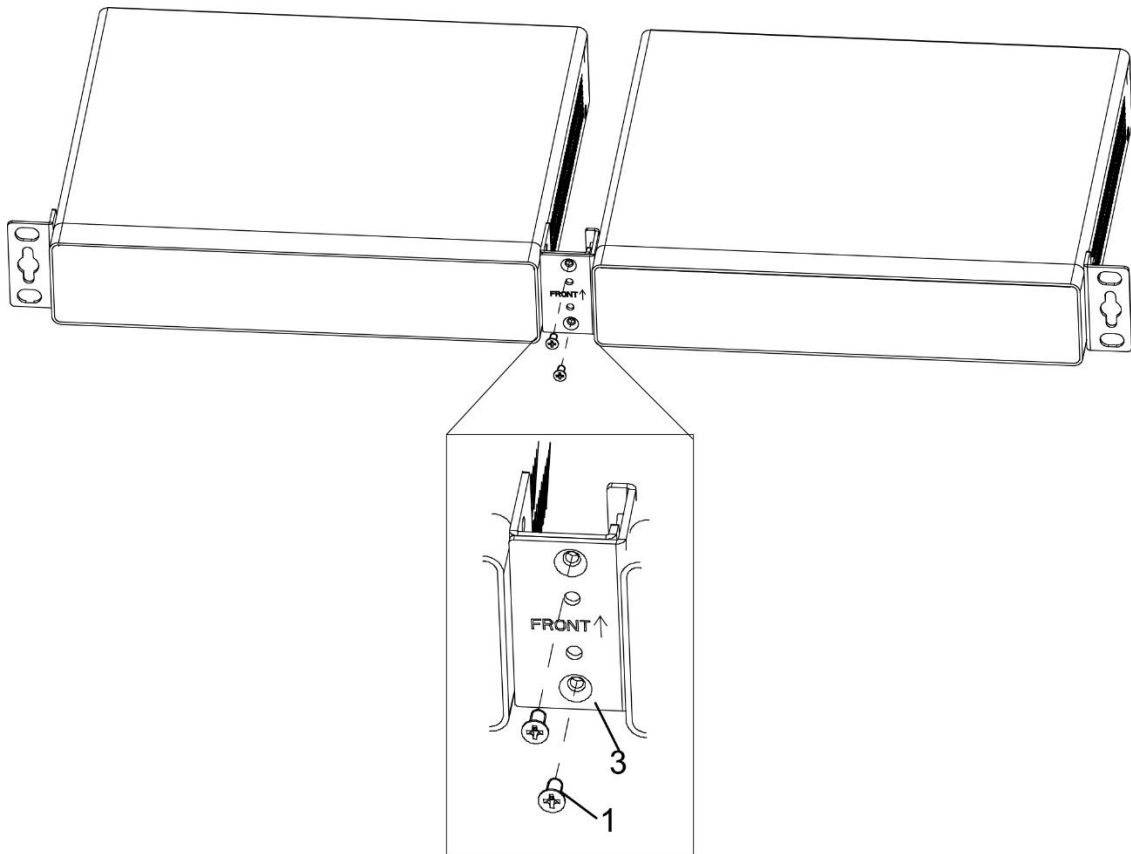


Figure 2-5 Secure the Connecting Brackets

Step 4 Prepare the clip nuts and M5 screws or M6 screws to secure two devices to the rack posts.

Install Mounting Ears

Supported Devices

DT60 series 4K device.

Important

- Prepare the rack and screws by yourself.
- If you install multiple layers of devices in the rack, keep at least one rack post hole between each layer of devices.

Steps

Step 1 Use three KM3 × 6 countersunk screws (1) to secure one mounting ear (2) to the left side of the device (3), and the other mounting ear to the right side.

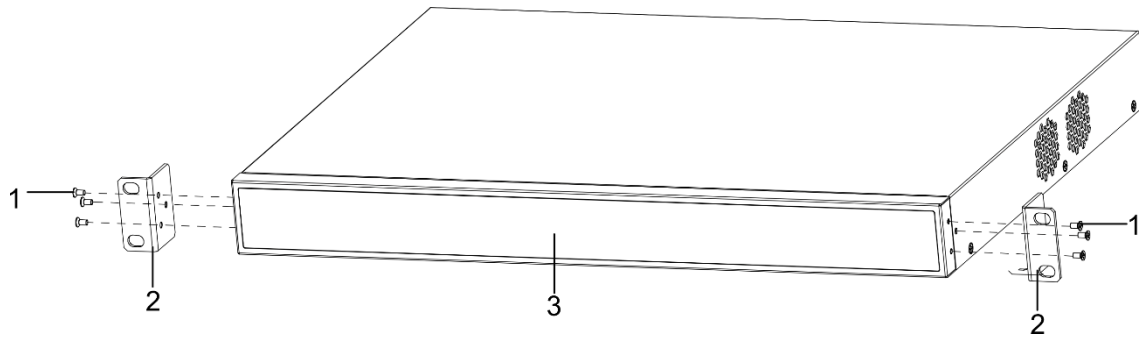


Figure 2-6 Install the Mounting Ears

Step 2 Prepare the clip nuts and M5 screws or M6 screws (5) to mount the device to the rack posts (4).

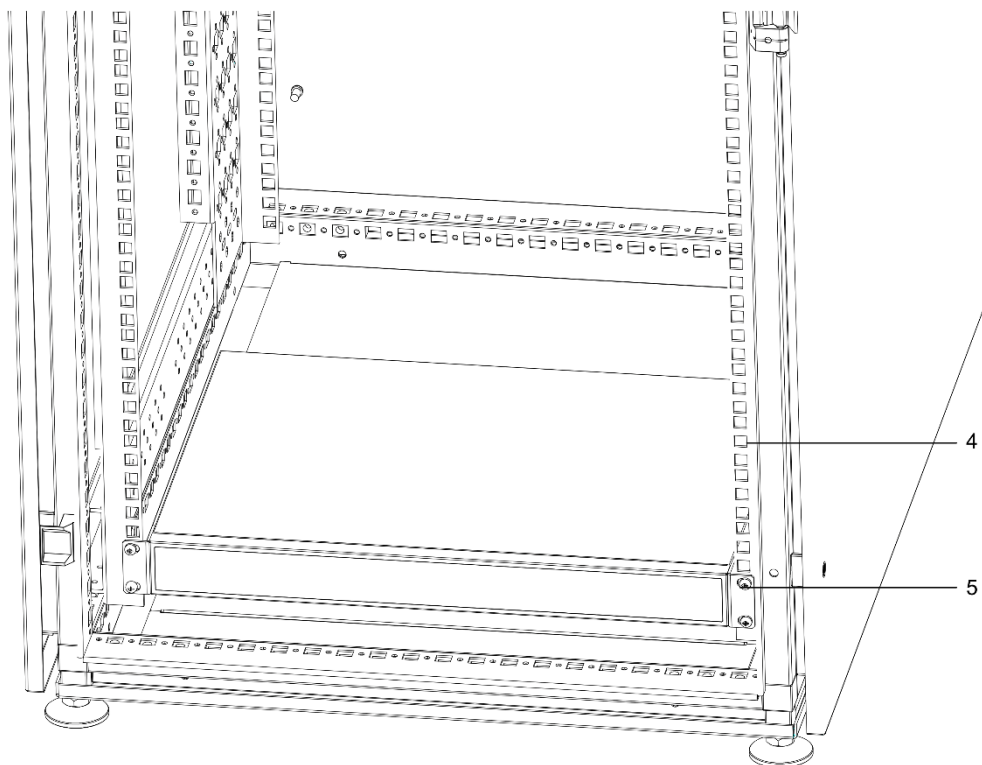


Figure 2-7 Install 4K Device in the Rack

Use Provided Mounting Ears

Supported Devices

DT90 series device.

Important

- Prepare the rack and screws by yourself.
- If you install multiple layers of devices in the rack, keep at least one rack post hole between each layer of devices.

Steps

The device comes with mounting ears pre-installed. Prepare your own rack and use the rack-provided screws (1) to secure the device to the rack posts (2).

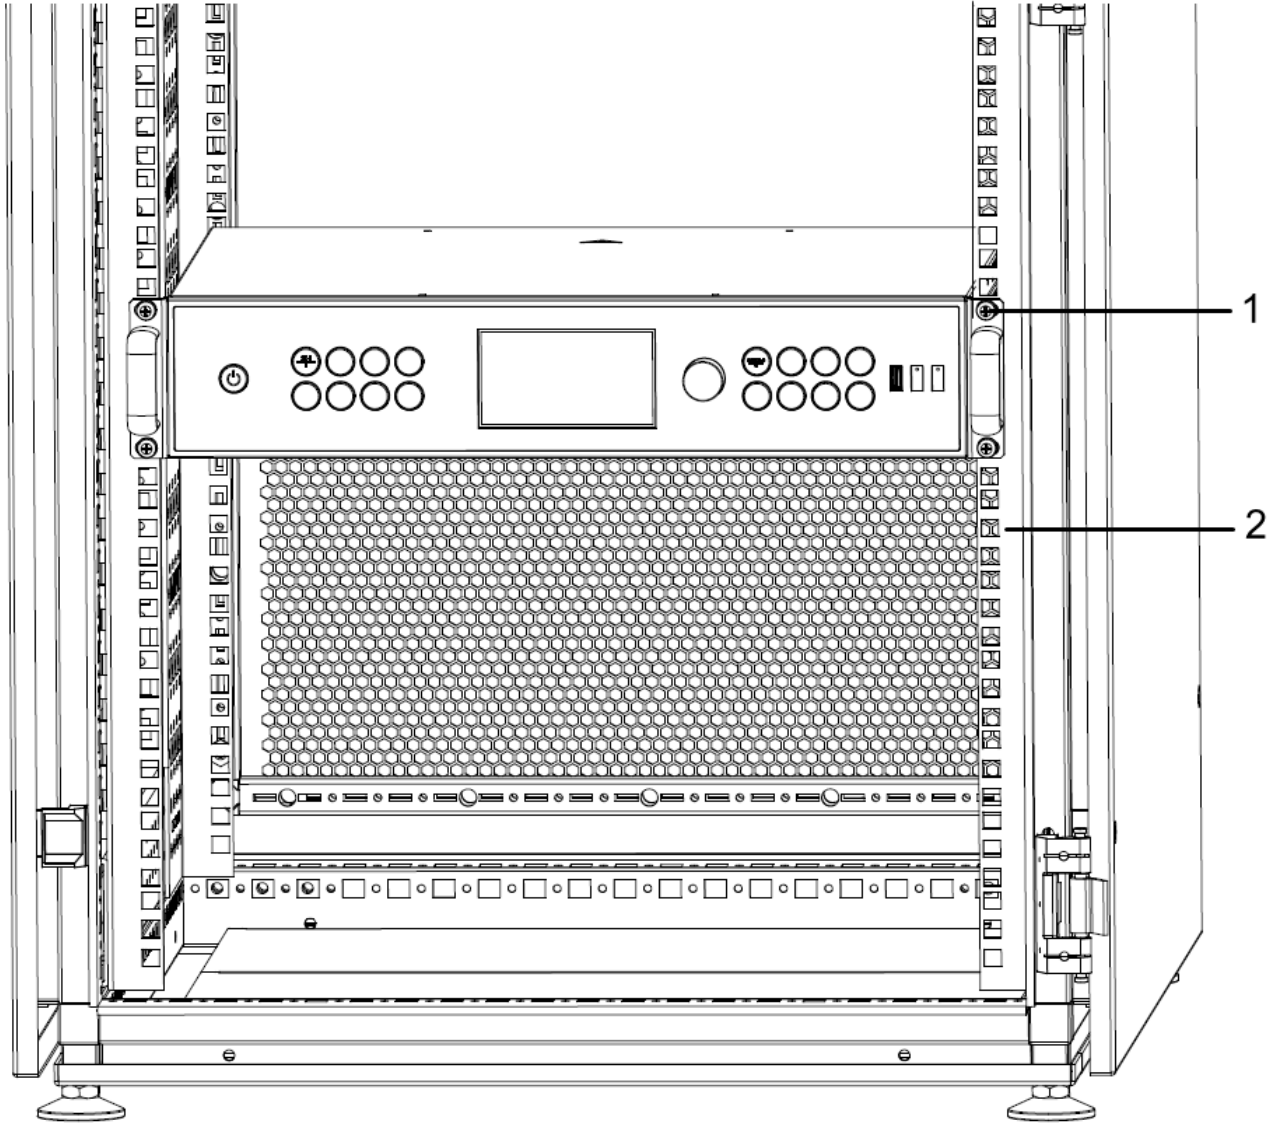


Figure 2-8 Install the DT90 Device in the Rack

2.4 Connect Cables

2.4.1 Connect the Ground wire

Connecting the ground wire can release the excessive voltage and current induced by lightning shock. Please select a reliable grounding method based on the on-site installation environment.

- Must be grounded: DT60 series and DT90 series devices.
- No grounding required: DT30 series device.

The following uses the DT60 series 4K device as an example to illustrate the grounding method.

Use Grounding Busbar

Step 1 Connect one end of the ground wire (2) to the terminal post of the server room grounding busbar (3).

Step 2 Connect the other end of the ground wire to the equipment grounding terminal (1) and tighten the screw.

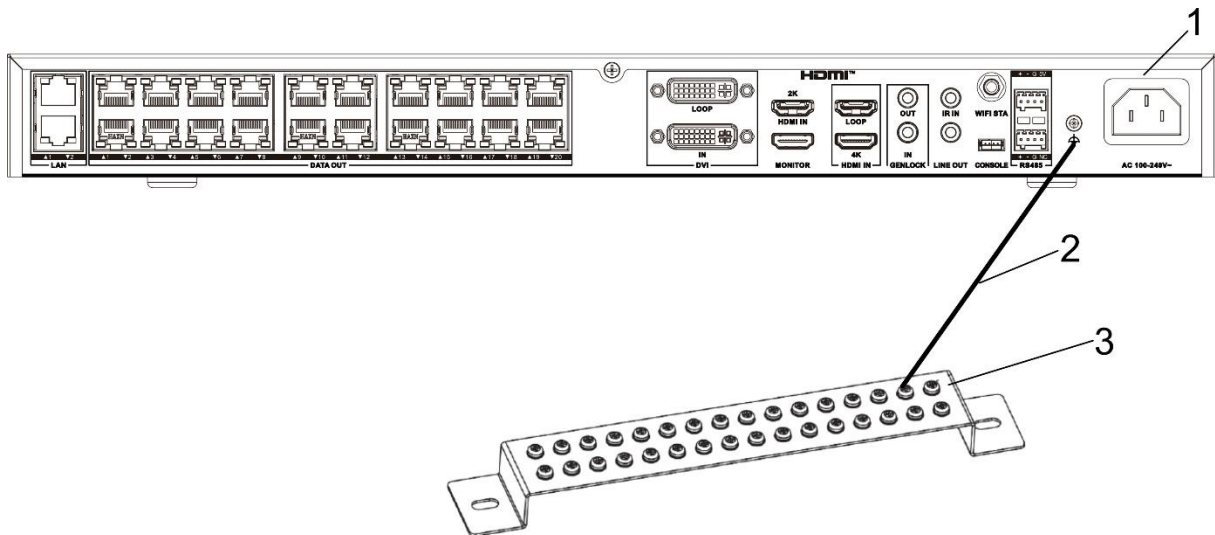


Figure 2-9 Connect the Ground wire to the Grounding Busbar

Use Grounding Electrode

Step 1 Drive an angle steel or steel pipe (4) with a length ≥ 0.5 m into the ground (3) as a grounding electrode.

Step 2 Weld one end of the ground wire (2) to the grounding electrode and then apply anti-corrosion treatment (e.g., galvanizing or coating) to the welded joint.

Step 3 Connect the other end of the ground wire to the equipment grounding terminal (1).

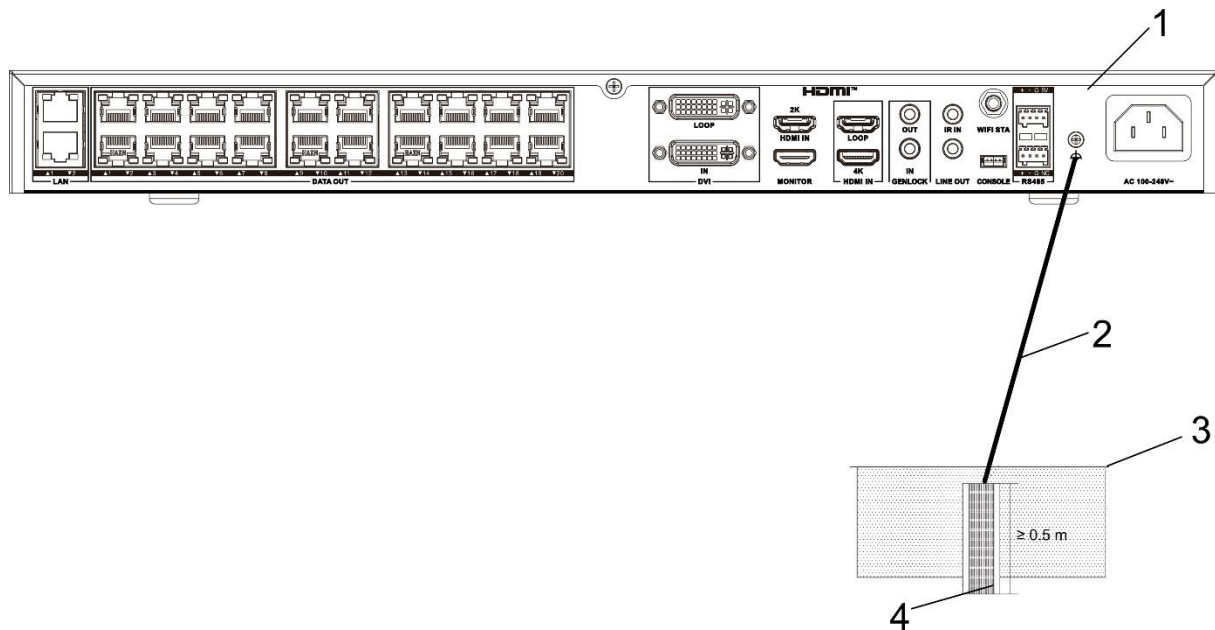


Figure 2-10 Connect the Ground wire to the Grounding Electrode

2.4.2 Connect the Network Cable

For network connections between devices and switches/network equipment, use Category 5e or higher Ethernet cables (Cat6 recommended), with a maximum transmission distance of 100 meters.

2.4.3 Connect the Power Cord

Select the appropriate power cord to connect the power socket of the device to the power supply. Upon cable connection, the device will power on and initiate startup automatically.

- DC power: Suitable for DT30 series device.
- AC power: Suitable for DT60 series and DT90 series devices.

2.5 Configure Display Mapping

After the device and display are connected, you can use either of the following methods to configure display mapping:


- Use the LED Tool client. Download the [LED Tool client](#), and then scan the QR code in Table 2-4 to view the user manual to lighten the screens.
- Use the web page of the device. Scan the QR code in Table 2-4 to view the user manual to lighten the screens.

Note

Obtaining the manual requires network data traffic. It is recommended to be performed in a Wi-Fi environment.

Table 2-4 Related Documents

Document Name	QR Code
LED Tool client user manual	
LED controller user manual	



See Far, Go Further