



2N Indoor View

Indoor station with 7" touch display

The high-end 2N Indoor View will look at home installed in even the most luxurious of penthouses. It supports widescreen HD video calling and boasts multiple advanced features, including smart home integration.

7" HD touchscreen

Your customer will appreciate how easy it is to operate the unit on the large display. The home screen even provides the current weather forecast.

Full screen video calls

We've enlarged the video call preview, allowing residents to read a courier's name tag with ease. Widescreen calls are compatible only with Full HD 2N intercoms.

Smart home integration

Residents can turn on the air conditioning, lighting, or call the lift directly from the display on their unit. Just one piece of hardware to open the door and control the entire home.

Video surveillance

The resident can see what is going on in places where no intercom has been installed, and there is only an IP camera (e.g., a hallway, yard or garage).


Great for retrofit projects

In addition to the classic Ethernet version, we also offer a Wi-Fi variant which is great for adding all these advanced features to places without network cabling.

Free intercom-to-mobile app calls

All new residential installations now get [free intercom-to-My2N app video calls](#) with every indoor station. No extra cost. No hidden fees. For the lifetime of the indoor station.

Variants

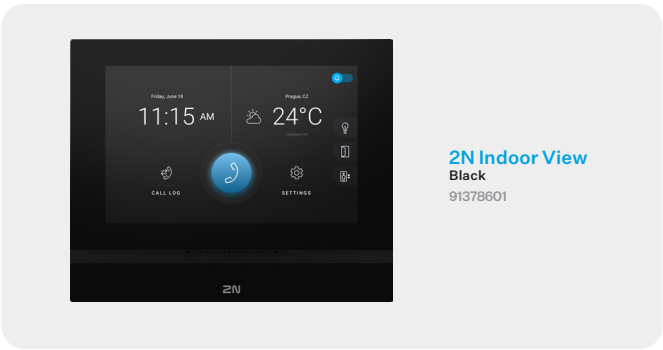

2N Indoor View
Black
91378601



2N Indoor View
White
91378601WH



2N Indoor
View Wi-Fi
Black
91378611



2N Indoor
View Wi-Fi
White
91378611WH

Technical Parameters

Power Supply

Type:	12V DC adapter or PoE 802.3af
Recommended power supply:	12V/1A
Reverse polarity protection:	yes

User Interface

Controls:	capacitive touch panel
Display size:	7" colour display
Resolution:	1024x600px

Audio

Microphone:	integrated
Speaker:	integrated, 2W/8 Ω
Induction loop output:	600mV RMS
Codecs:	G.711a/u, G.722, G.729, L16/16 kHz

Video

Codecs:	H.264
---------	-------

Interface

LAN:	10/100BaseT, RJ-45
Recommended cabling:	Cat5e or higher

Doorbell Input

Input type:	switching contact (button/relay)
Contact type:	normally open (NO)
Contact parameters:	up to 50V/5mA, DC

Wi-Fi (optional)

Frequency:	2.4GHz and 5GHz
Standard:	802.11n and 802.11ac
Antenna:	in-built
Important:	supports simultaneous Wi-Fi and Ethernet connectivity

Mechanical Parameters

Dimensions (W x H x D):	193 × 157 × 50mm
Weight:	555g
Operating temperature:	0 to 50°C
Relative operating humidity:	10 to 90% (non-condensing)
Storage temperature:	-20 to 70°C
Recommended altitude:	0 to 2000m

Warranty

Length	5 years (detailed terms: www.2n.com/warranty)
--------	---

2N TELEKOMUNIKACE a.s.

Prague, Czech Republic | +420 261 301 500 | sales@2n.com

2N.com