


Professional LCD Laser Projector

Sharp P701U

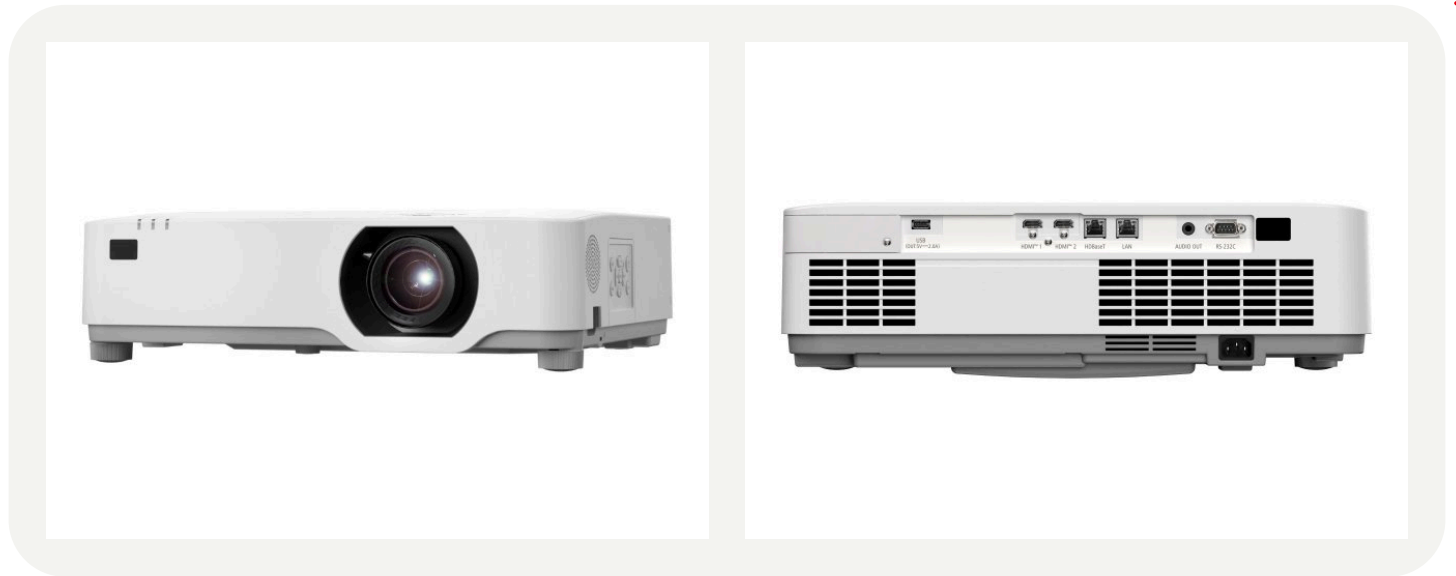

Super silent and brilliantly versatile

Quieter than the tick of a watch, the P701U operates unobtrusively, delivering impressive projection performance without any noise distraction. With 7,000 ANSI lumens, WUXGA resolution, and 4K@30Hz input support, it produces sharp, detailed visuals with consistent clarity even in well-lit environments. Comprehensive connectivity ensures easy integration into a variety of installation scenarios, including meeting rooms, lecture halls, and immersive exhibitions.

Engineered for long-term reliability, the fully sealed optical LCD laser engine provides up to 20,000 hours of maintenance-free performance. With no lamps nor filters to replace, and low power consumption, the P701U combines dependable performance with low operating costs. Risk Group 2 compliance allows for safe operation without prescribed safety precautions, making it a practical choice for professional settings where dependable image quality and quiet performance are priorities.

Benefits

No filter service required – a completely sealed optical laser LCD engine allows a filter-free design. Brilliant colour brightness is maintained and servicing costs need no longer feature in your budget.

Low Noise Level – with 22dB, the silent technology will not disturb your meeting.

Future-proof input management – thanks to 4K@30 Hz input processing.

No lamp replacement – up to 20,000 h maintenance free operation possible due to Laser Light Source.

Risk Group 2 – because of the Risk Group 2 compliance, no prescribed safety precautions are necessary.

Specifications

Product Information

Product Name

Sharp P701U

Product Group

Professional LCD Laser Projector

Order Code

60006202

Image

Projection Technology

3LCD Technology

Native Resolution

1920 x 1200
(WUXGA)

Aspect Ratio

16:10

Contrast Ratio

3000000:1

Brightness

7000 Lm Normal / 7400 Lm Center / 6300 Lm Silent Mode;
compliant with ISO21118-2020

Lamp

Laser Light Source

Light Source Life [hrs]

20000¹

Lens

F= 1.6-2, f= 15.3-24.6 mm

Lens shift

H:±20, V:+44,-0

Keystone correction

+/- 30° manual horizontal / +/- 30° manual vertical

Projection Factor

1.08 – 1.76 : 1

Projection Distance [m]

0.8 – 12.9

Screen Size (diagonal) [cm] / [inch]

Maximum: 762 / 300"; Minimum: 76.2 / 30"

Zoom

Manual; x1.6

Focus Adjustment

Manual

Supported Resolutions

1080i/60; 1280 x 800 (60); 3840 x 2160 (30)
1080p/60; 1920 x 1200 (60);

Connectivity

Digital

Input: 1 x HDBaseT; 2 x HDMI™ supporting HDCP

Audio

Output: 1 x 3.5 mm Stereo Mini Jack (variable)

Control

Input: 1 x D-Sub 9 pin (RS-232) (male)

LAN

1 x RJ45

USB

1 x Type B (for Service); 1x Type A (USB 2.0 high speed) with 2.0A Power Supply

Remote Control

Remote Control

Aspect Ratio; Audio Control; Auto Adjust; Eco Mode Control; Freeze-function; Help-function; ID set; Keystone Correction; Magnify-function; Page (up, down); Picture Adjust; Picture Mute; Power (On-OFF); Select (up, down, left, right); Source Select

Electrical

Power Supply

100-240 V AC; 50 - 60 Hz

Power Consumption [W]

365 Normal / 330 Silent Mode / 1 Network Stand-by / 0.4 Stand-by

Mechanical

Dimensions (W x H x D) [mm]

480 x 122 x 407 (without lens and feet)

Weight [kg]

9.7

Fan Noise [dB (A)]

31 / 22 (Normal / Silent)

Colour Versions

White

Environmental Conditions

Operating Temperature [°C]

5 to 40

Operating Humidity [%]

20 to 80

Storage Temperature [°C]

-10 to 50

Storage Humidity [%]

20 to 80

Ergonomics

Safety and Ergonomics

CE; ErP; RoHS; TUEV Type Approved

Speakers [W]

1 x 20 (mono)

Additional Features

Special Characteristics

AMX Beacon; Auto Power ON/OFF; Carbon Savings Meter; Constant Brightness Mode; Control ID Function; Crestron Connected; Direct Power-Off Function; Free Tilt; HDBaseT; HTTP Browser Control; Kensington security slot; Keypad Lock; Light Source Adjustment; Magnify; NaViSet Administrator 2; Optional User Logo; OSD with 25 languages; Password Security System; PJ LINK; Portrait Setting; Quick Start; Source Select with Beep Function; Test Pattern; Unique Power Saving Functions; USB Viewer

Green Features

Ecological Materials

Downloadable manuals; ECO packaging

Ecological Standards

ErP compliant; RoHS compliant

Warranty

Projectors

3 years pan-European service

Light Source

3 years or 10000h (whatever comes first)

Shipping Content

Shipping Contents

2x AAA Batteries; IR Remote Control (477E); Lens Cap; Power Cord (1.8 m); Projector; Quick Setup Guide; Security Sticker; Users Manual; Utility software

Optional Accessories

Optional Accessories

Universal Ceiling Mounts (PJ01UCM, PJ02UCMPF)

¹ 50% of initial brightness at the end of specified laser life time at 25 degree ambient temperature.



CE



TUEV Type Approved



RoHS



ErP

This document is © 2026 Sharp Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 20.02.2026